





GARLOCK BEARINGS LTD

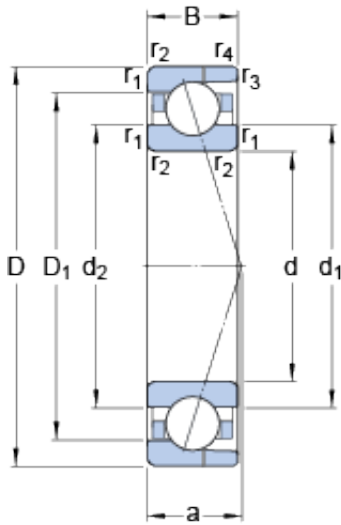

7006 ACD/HCP4AH SKF High Speed Angular Contact Ball Bearings

Bearing No. 7006 ACD/HCP4AH

7006 ACD/HCP4AH Bearing 2D drawings and 3D CAD models

Size	55x30x13 mm
Bore Diameter	55 mm
Outer Diameter	30 mm
Width	13 mm
d	30 mm
D	55 mm
B	13 mm
d ₁	37.7 mm
d ₂	37.7 mm
D ₁	47.3 mm
K	0.5 mm
C ₁	7.8 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.3 mm
a	16.6 mm
d _a - min.	34.6 mm
d _b - min.	34.6 mm
D _a - max.	50.4 mm
D _b - max.	53 mm
r _a - max.	1 mm
r _b - max.	0.3 mm
d _n	39.3 mm
Basic dynamic load rating - C	13.8 kN
Basic static load rating - C ₀	7.6 kN



GARLOCK BEARINGS LTD

Fatigue load limit - P_u	0.325 kN
Limiting speed for grease lubrication	34000 r/min
Limiting speed for oil lubrication	53000 mm/min
Ball - D_w	7.938 mm
Ball - z	14
G_{ref}	1.59 cm ³
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	90 N
Preload class B - G_B	180 N
Preload class C - G_C	360 N
Preload class D - G_D	720 N
Calculation factor - f	1.06
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2D}	1.08
Calculation factor - f_{HC}	1.02
Preload class A	88 N/micron
Preload class B	113 N/micron
Preload class C	147 N/micron



GARLOCK BEARINGS LTD

Preload class D	195 N/micron
d_1	37.7 mm
d_2	37.7 mm
D_1	47.3 mm
C_1	7.8 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	34.6 mm
d_b min.	34.6 mm
D_a max.	50.4 mm
D_b max.	53 mm
r_a max.	1 mm
r_b max.	0.3 mm
d_n	39.3 mm
Basic dynamic load rating C	13.8 kN
Basic static load rating C_0	7.65 kN
Fatigue load limit P_u	0.325 kN
Attainable speed for grease lubrication	34000 r/min
Attainable speed for oil-air lubrication	53000 r/min
Ball diameter D_w	7.938 mm
Number of balls z	14
Reference grease quantity G_{ref}	1.59 cm ³
Preload class A G_A	90 N
Static axial stiffness, preload class A	88 N/ μ m
Preload class B G_B	180 N
Static axial stiffness, preload class B	113 N/ μ m
Preload class C G_C	360 N
Static axial stiffness, preload class C	147 N/ μ m



GARLOCK BEARINGS LTD

Preload class D G_D	720 N
Static axial stiffness, preload class D	195 N/ μ m
Calculation factor f	1.06
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{2D}	1.08
Calculation factor f_{HC}	1.02
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.095 kg