




# GARLOCK BEARINGS LTD

## S71906 CD/P4A SKF High Speed Angular Contact Ball Bearings

Bearing No. S71906 CD/P4A

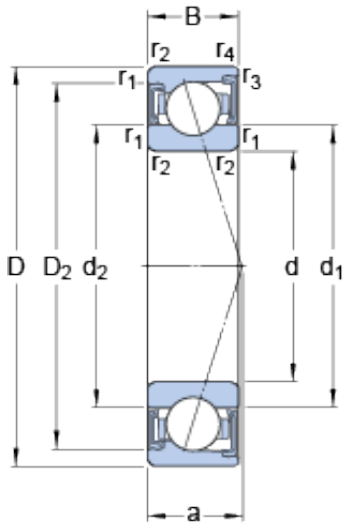

S71906 CD/P4A Bearing 2D drawings and 3D CAD models

Size	47x30x9 mm
Bore Diameter	47 mm
Outer Diameter	30 mm
Width	9 mm
d	30 mm
D	47 mm
B	9 mm
d <sub>1</sub>	35.6 mm
d <sub>2</sub>	35.6 mm
D <sub>2</sub>	44.15 mm
r <sub>1,2</sub> - min.	0.3 mm
r <sub>3,4</sub> - min.	0.2 mm
a	9.7 mm
d <sub>a</sub> - min.	32 mm
d <sub>a</sub> - max.	35.1 mm
d <sub>b</sub> - min.	32 mm
d <sub>b</sub> - max.	35.1 mm
D <sub>a</sub> - max.	45 mm
D <sub>b</sub> - max.	45.6 mm
r <sub>a</sub> - max.	0.3 mm
r <sub>b</sub> - max.	0.2 mm
Basic dynamic load rating - C	7.2 kN
Basic static load rating - C <sub>0</sub>	4.6 kN
Fatigue load limit - P <sub>u</sub>	0.193 kN



## GARLOCK BEARINGS LTD

Limiting speed for grease lubrication	30000 r/min
Ball - $D_w$	4.762 mm
Ball - z	20
Calculation factor - $f_0$	10.4
Preload class A - $G_A$	25 N
Preload class B - $G_B$	50 N
Preload class C - $G_C$	100 N
Preload class D - $G_D$	200 N
Calculation factor - f	1.08
Calculation factor - f	1
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.04
Calculation factor - $f_{2C}$	1.09
Calculation factor - $f_{2D}$	1.15
Calculation factor - $f_{HC}$	1
Preload class A	26 N/micron
Preload class B	35 N/micron
Preload class C	47 N/micron
Preload class D	67 N/micron
$d_1$	35.6 mm
$d_2$	35.6 mm
$D_2$	44.15 mm
$r_{1,2}$ min.	0.3 mm
$r_{3,4}$ min.	0.2 mm
$d_a$ min.	32 mm
$d_a$ max.	35.1 mm
$d_b$ min.	32 mm
$d_b$ max.	35.1 mm
$D_a$ max.	45 mm
$D_b$ max.	45.6 mm



## GARLOCK BEARINGS LTD

$r_a$ max.	0.3 mm
$r_b$ max.	0.2 mm
Basic dynamic load rating C	7.15 kN
Basic static load rating $C_0$	4.55 kN
Fatigue load limit $P_u$	0.193 kN
Attainable speed for grease lubrication	30000 r/min
Ball diameter $D_w$	4.762 mm
Number of balls z	20
Preload class A $G_A$	25 N
Static axial stiffness, preload class A	26 N/ $\mu$ m
Preload class B $G_B$	50 N
Static axial stiffness, preload class B	35 N/ $\mu$ m
Preload class C $G_C$	100 N
Static axial stiffness, preload class C	47 N/ $\mu$ m
Preload class D $G_D$	200 N
Static axial stiffness, preload class D	67 N/ $\mu$ m
Calculation factor f	1.08
Calculation factor $f_1$	1
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.04
Calculation factor $f_{2C}$	1.09
Calculation factor $f_{2D}$	1.15
Calculation factor $f_{HC}$	1
Calculation factor $f_0$	10.4
Mass bearing	0.049 kg