




GARLOCK BEARINGS LTD

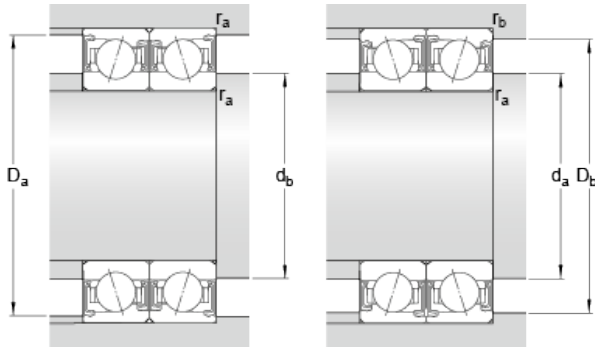

S71907 ACDTP/P4B SKF High Speed Angular Contact Ball Bearings

Bearing No. S71907 ACDTP/P4B

S71907 ACDTP/P4B Bearing 2D drawings and 3D CAD models

d	35 mm
D	55 mm
B	10 mm
d ₁	41.6 mm
d ₂	41.6 mm
D ₂	50.07 mm
r _{1,2} min.	0.6 mm
r _{3,4} min.	0.3 mm
a	15.6 mm
d _a min.	38.2 mm
d _a max.	41.1 mm
d _b min.	38.2 mm
d _b max.	41.1 mm
D _a max.	51.8 mm
D _b max.	53.6 mm
r _a max.	0.6 mm
r _b max.	0.3 mm
Basic dynamic load rating C	9.23 kN
Basic static load rating C ₀	6.2 kN
Fatigue load limit P _u	0.26 kN
Attainable speed for grease lubrication	22000 r/min
Ball diameter D _w	5.556 mm
Number of balls z	21
Preload class A G _A	60 N
Static axial stiffness, preload	81 N/ μ m



GARLOCK BEARINGS LTD

class A	
Preload class B G_B	120 N
Static axial stiffness, preload class B	105 N/ μ m
Preload class C G_C	240 N
Static axial stiffness, preload class C	137 N/ μ m
Preload class D G_D	480 N
Static axial stiffness, preload class D	183 N/ μ m
Calculation factor f	1.1
Calculation factor f_1	0.98
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.04
Calculation factor f_{2C}	1.08
Calculation factor f_{2D}	1.14
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Mass bearing	0.077 kg