




GARLOCK BEARINGS LTD

71907 ACD/HCP4A SKF High Speed Angular Contact Ball Bearings

Bearing No. 71907 ACD/HCP4A

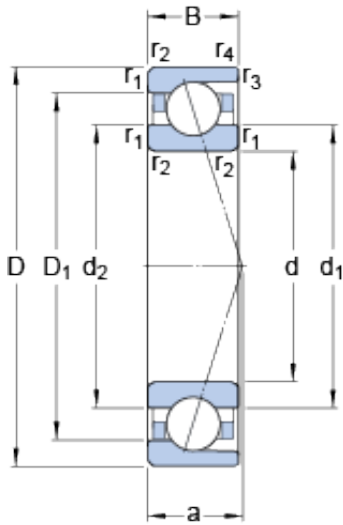

71907 ACD/HCP4A Bearing 2D drawings and 3D CAD models

Size	55x35x10 mm
Bore Diameter	55 mm
Outer Diameter	35 mm
Width	10 mm
d	35 mm
D	55 mm
B	10 mm
d ₁	41.6 mm
d ₂	41.6 mm
D ₁	48.4 mm
r _{1,2} - min.	0.6 mm
r _{3,4} - min.	0.3 mm
a	15.6 mm
d _a - min.	38.2 mm
d _b - min.	38.2 mm
D _a - max.	51.8 mm
D _b - max.	53.6 mm
r _a - max.	0.6 mm
r _b - max.	0.3 mm
d _n	43 mm
Basic dynamic load rating - C	9.2 kN
Basic static load rating - C ₀	6.2 kN
Fatigue load limit - P _u	0.26 kN
Limiting speed for grease	28000 r/min



GARLOCK BEARINGS LTD

Lubrication	
Limiting speed for oil lubrication	43000 mm/min
Ball - D_w	5.556 mm
Ball - z	21
G_{ref}	0.93 cm ³
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	60 N
Preload class B - G_B	120 N
Preload class C - G_C	240 N
Preload class D - G_D	480 N
Calculation factor - f	1.1
Calculation factor - f_1	0.98
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.07
Calculation factor - f_{2C}	1.12
Calculation factor - f_{2D}	1.17
Calculation factor - f_{HC}	1.04
Preload class A	90 N/micron
Preload class B	117 N/micron
Preload class C	152 N/micron
Preload class D	203 N/micron



GARLOCK BEARINGS LTD

d_1	41.6 mm
d_2	41.6 mm
D_1	48.4 mm
$r_{1,2}$ min.	0.6 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	38.2 mm
d_b min.	38.2 mm
D_a max.	51.8 mm
D_b max.	53.6 mm
r_a max.	0.6 mm
r_b max.	0.3 mm
d_n	43 mm
Basic dynamic load rating C	9.23 kN
Basic static load rating C_0	6.2 kN
Fatigue load limit P_u	0.26 kN
Attainable speed for grease lubrication	28000 r/min
Attainable speed for oil-air lubrication	43000 r/min
Ball diameter D_w	5.556 mm
Number of balls z	21
Reference grease quantity G_{ref}	0.93 cm ³
Preload class A G_A	60 N
Static axial stiffness, preload class A	90 N/ μ m
Preload class B G_B	120 N
Static axial stiffness, preload class B	117 N/ μ m
Preload class C G_C	240 N
Static axial stiffness, preload class C	152 N/ μ m
Preload class D G_D	480 N
Static axial stiffness, preload	203 N/ μ m



GARLOCK BEARINGS LTD

class D	
Calculation factor f	1.1
Calculation factor f_1	0.98
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.07
Calculation factor f_{2C}	1.12
Calculation factor f_{2D}	1.17
Calculation factor f_{HC}	1.04
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.068 kg