




GARLOCK BEARINGS LTD

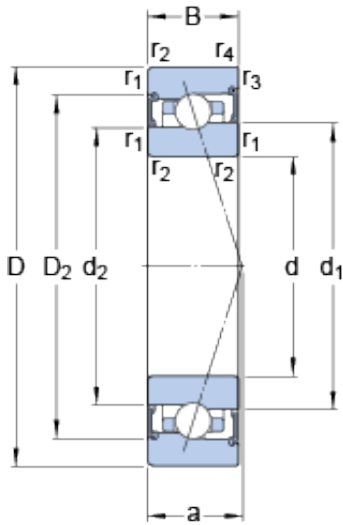

S71907 ACB/P4A SKF High Speed Angular Contact Ball Bearings

Bearing No. S71907 ACB/P4A

S71907 ACB/P4A Bearing 2D drawings and 3D CAD models

Size	55x35x10 mm
Bore Diameter	55 mm
Outer Diameter	35 mm
Width	10 mm
d	35 mm
D	55 mm
B	10 mm
d ₁	42.46 mm
d ₂	41.56 mm
D ₂	49.5 mm
r _{1,2} - min.	0.6 mm
r _{3,4} - min.	0.3 mm
a	18.4 mm
d _a - min.	38.2 mm
d _a - max.	41.9 mm
d _b - min.	38.2 mm
d _b - max.	41 mm
D _a - max.	51.8 mm
D _b - max.	53 mm
r _a - max.	0.6 mm
r _b - max.	0.3 mm
Basic dynamic load rating - C	4.9 kN
Basic static load rating - C ₀	3.4 kN
Fatigue load limit - P _u	0.146 kN



GARLOCK BEARINGS LTD

Limiting speed for grease lubrication	30000 r/min
Ball - D_w	3.969 mm
Ball - z	25
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	29 N
Preload class B - G_B	58 N
Preload class C - G_C	175 N
Calculation factor - f	1.06
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.07
Calculation factor - f_{HC}	1
Preload class A	59 N/micron
Preload class B	75 N/micron
Preload class C	114 N/micron
d_1	42.46 mm
d_2	41.56 mm
D_2	49.5 mm
$r_{1,2}$ min.	0.6 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	38.2 mm



GARLOCK BEARINGS LTD

d_a max.	41.9 mm
d_b min.	38.2 mm
d_b max.	41 mm
D_a max.	51.8 mm
D_b max.	53 mm
r_a max.	0.6 mm
r_b max.	0.3 mm
Basic dynamic load rating C	6.5 kN
Basic static load rating C_0	5.85 kN
Fatigue load limit P_u	0.146 kN
Attainable speed for grease lubrication	30000 r/min
Ball diameter D_w	3.969 mm
Number of balls z	25
Preload class A G_A	29 N
Static axial stiffness, preload class A	59 N/ μ m
Preload class B G_B	58 N
Static axial stiffness, preload class B	75 N/ μ m
Preload class C G_C	175 N
Static axial stiffness, preload class C	114 N/ μ m
Calculation factor f	1.06
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.07
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38



GARLOCK BEARINGS LTD

Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.081 kg